

# EM-800/700/600/410 WIRED MICROPHONES



Microphones designed with superior voice clarity for speech applications ensure optimal intelligibility.





# EM-800

## **Gooseneck Microphone**

- Ideal for speech applications including meetings, lectures, and religious services.
- Electret condenser microphone element with cardioid pattern for focused pickup.
- Excellent high-frequency response of 60 20k Hz delivers clear output even through a PA system.
- High sensitivity (–35dB) provides a satisfying tonal response.
- Gooseneck with two adjustment points allows more flexible microphone positioning angles.
- Rejection of undesirable off-axis sound minimizes possible feedback.

 Phantom power range of 9 to 52 volts enhances operational versatility.

ST-800
Microphone Stand (option)



## EM-700

## **Boundary Microphone**


- Ideal for speech and recording applications at meetings, lectures, and religious services.
- Electret condenser microphone element with cardioid pattern for focused pickup.
- Design, optimized to deliver best performance when used on a desk.
- · Slim, stylish design suits interior decor.
- Rejection of undesirable off-axis sound minimizes possible feedback.
- Low-cut filter switch prevents interference from ambient noise from being picked up.
- Wide frequency range of 35 20 kHz provides well-balanced sound with clarity and a satisfying tonal response.
- Phantom power range of 9 to 52 volts enhances operational versatility.



## EM-600

## **Flush-Mount Boundary Microphone**

- Ideal for conference room recording and security monitoring.
- Electret condenser microphone element with omnidirectional pattern for comprehensive pickup.
- Unobtrusive design allows easy flush-mounting in walls, ceilings, and desktops.
- Optimized to deliver best performance when used on a desk or attached to a ceiling.
- A 50 Hz low-cut filter reduces intrusive noise, such as air conditioner rumble or door opening/closing.
- Two rubber isolation rings are provided as an accessory serving to reduce vibration.
- Wide frequency range of 30 20 kHz provides wellbalanced sound with clarity and a satisfying tonal response.
- Phantom power range of 9 to 52 volts enhances operational versatility.

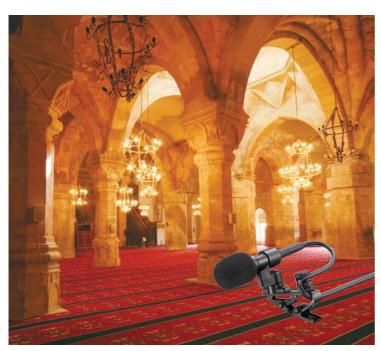


# EM-410

#### **Lavalier Microphone**

- Ideal for voice-oriented applications such as lectures, presentations and religious services.
- Compact electret condenser microphone element with hypercardioid pattern for highly focused pickup.
- Designed for best performance when attached to the chest area.
- The cable holder minimizes noise from cable and clothes rustling.
- Capsule rotates 360 degrees, for optimal pickup even when worn on a lapel.
- Phantom power range of 9 to 52 volts enhances operational versatility.

## **SPECIFICATIONS**

Model	EM-800 Gooseneck Microphone	ST-800 Microphone Stand	EM-700 Boundary Microphone	EM-600 Flush-Mount Boundary Microphone	EM-410 Lavalier Microphone
Element	Electret condenser	_	Electret condenser	Electret condenser	Electret condenser
Polar Pattern	Cardioid	_	Cardioid	Omnidirectional	Hypercardioid
Rated Impedance	120 $\Omega$ , balanced	_	120 $\Omega$ , balanced	120 $\Omega$ , balanced	120 $\Omega$ , balanced
Rated Sensitivity	-35 dB (1kHz 0 dB = 1 V/Pa)	_	-33 dB (1k Hz 0 dB = 1 V/Pa)	-36 dB (1k Hz 0 dB = 1 V/Pa)	-47 dB (1k Hz 0 dB = 1 V/Pa)
Phantom Power	9 – 52V DC	_	9 – 52V DC	9 – 52V DC	9 – 52V DC
Frequency Response	60 Hz – 20kHz	_	35 Hz – 20kHz	30 Hz – 20kHz	100 Hz – 15kHz
Low Cut	_	_	100 Hz, - 12 dB/oct	_	_
Input Connector	_	XLR-3-31 equivalent	_	_	_
Output Connector	XLR-3-12 equivalent	XLR-3-32 equivalent	XLR-3-12 equivalent	XLR-3-12 equivalent	Blanced-phone plug
Cable Length	_	_	7.5m (24.61 ft)	_	5.0m (16.4 ft)
Operating Temperature	0°C to +40°C (32°F to 104°F)	_	0°C to +40°C (32°F to 104°F)	0°C to +40°C (32°F to 104°F)	0°C to +40°C (32°F to 104°F)
Finish	Body, Shaft: Copper alloy, black, semi-gloss, paint	Die-cast zinc black, mat finish, paint	Body: Die-cast aluminum, black, mat finish, paint Punched net: Surface-treated steel plate, black, mat finish, paint	Body: Steel, white, semi-gloss, paint Head: Zinc-plated steel wire, white, semi-gloss, paint	Body: Copper alloy, black, semi-gloss, paint
Dimensions	ø12 × 420mm (ø0.47" × 16.54")	115 (W) × 40 (H)× 124 (D)mm (4.53" × 1.57" × 4.88")	83 (W) $\times$ 23 (H) $\times$ 83 (D)mm (3.27" $\times$ 0.91" $\times$ 3.27") (cord excluded)	ø28 × 68mm (ø1.1" × 2.68")	$\emptyset 8.9 \times 28.6$ mm ( $\emptyset 0.35" \times 1.13"$ ) (cord excluded)
Weight	135g (0.3 lb)	715g (1.58 lb)	290g (0.64 lb)	85g (0.19 lb)	100g (0.22 lb)
Accessory	Windscreen × 1	_	_	Rubber Isolation Ring $\times$ 2, M20 Nut $\times$ 1	Windscreen $\times$ 1, Clip Holder $\times$ 1
Applicable Stand	Microphone Stand: ST-800 (option)	_	_	_	_

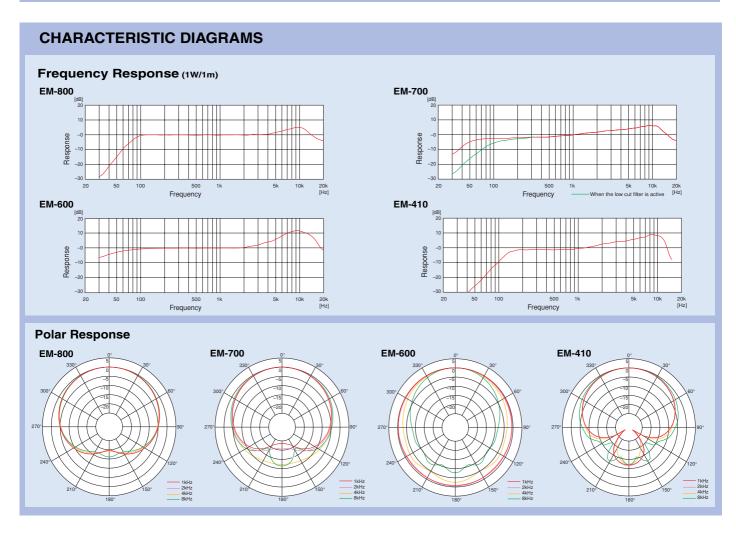



TOA Corporation