



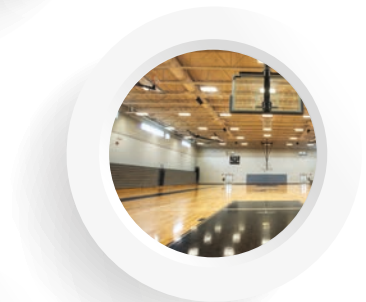

**PC-1860EN / PC-1860EN-FTQ**  
**PC-1860BS / PC-1860BS-C / PC-1865BS**  
**PC-2360EN / PC-2360EN-FTQ**  
Ceiling Speaker

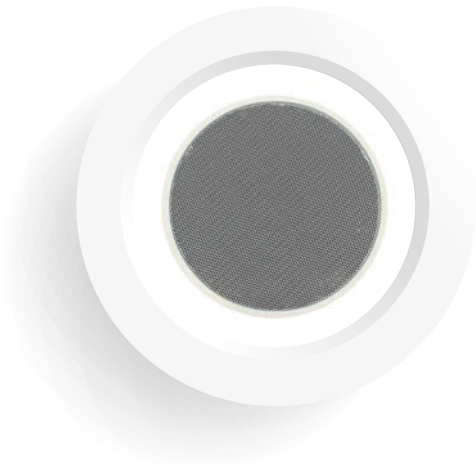

**Vast capacity and flexibility  
for system expansion beyond  
conventional system coverage.**

# PC-1860EN / PC-1860EN-FTQ / PC-1860BS / PC-1860BS-C / PC-1865BS / PC-2360EN / PC-2360EN-FTQ

## Ceiling Speaker

The ceiling speakers of the PC-series are suitable for announcements and BGM system use in high quality. The speaker's design harmonizes with modern architecture and decor.

PC-1860BS / PC-1860BS-C / PC-1865BS: These speakers are equipped with a fire dome to protect and prevents fire from spreading through the ceiling and thus the speakers are designed according to British Standard BS 5839-8: 2008 and EN54-24. // PC-1860EN / PC-2360EN: Certification to EN54

### Common Features

- 6W rated input
- Flat front panel
- Quick and easy installation


### PC-1860BS / PC-1860BS-C / PC-1865BS

- Ceramic screw terminal block and thermal fuse
- 12 cm speaker
- PC-1860BS-C with additional DC blocking capacitor
- Fire dome made of steel


### PC-1860EN / PC-1860EN-FTQ / PC-2360EN / PC-2360EN-FTQ

- PC-1860EN-FTQ / PC-2360EN-FTQ: ceramic screw terminal block and thermal fuse
- PC-1860EN / PC-2360EN: Snap in cable terminal
- 12 / 16 cm speaker
- Dripping-water protection cover


PC-1860BS / PC-1860BS-C

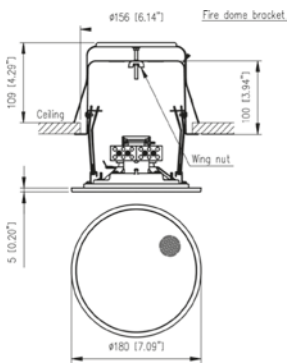


PC-1865BS



PC-1860EN / PC-1860EN-FTQ

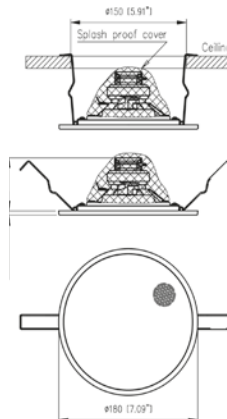

PC-2360EN / PC-2360EN-FTQ

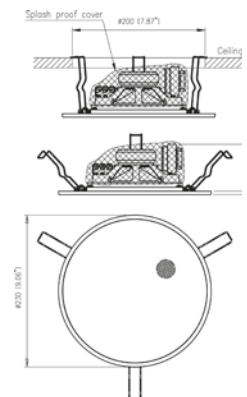

### Specifications

	PC-1860BS	PC-1860BS-C	PC-1865BS	PC-1860EN	PC-2360EN	PC-1860EN-FTQ	PC-2360EN-FTQ
Rated Input	6W (100V), 3W (70V)						
Tappings	6 / 3 / 1.5 / 0.8W (100V), 3 / 1.5 / 0.8 / 0.4W (70V)						
Sensitivity (1W, 1m)	95dB	94dB	95dB	94dB			
Frequency Response	170Hz – 20kHz		200Hz – 20kHz	80Hz – 20kHz	60Hz – 20kHz	80Hz – 20kHz	60Hz – 20kHz
Mounting Hole Diameter	156mm ±3mm		150mm ±3mm	150mm ±3mm	200mm ±3mm	150mm ±3mm	200mm ±3mm
Speaker Component	5" cone-type				6" cone-type	5" cone-type	6" cone-type
Connection	2-Steatite connecor (3 pole)		2-Steatite connecor (2 pole); 1 screw connection for earth	Push wire connection (Bridging terminal – 2 branch type)		2-Steatite connecor (3 pole)	
Colour	Traffic white (RAL 9016 or equivalent colour)						
Dimensions (ø x D)	180 x 105mm		180 x 95,6mm	180 x 70mm	230 x 76mm	180 x 70mm	230 x 76mm
Weight	1.1kg		0.86kg	0.56kg	0.74kg	0.63kg	0.8kg
EN 54-24 Certificate No	Certified according to EN54-24						

**TOA Electronics Europe GmbH**  
www.toa.eu

The technical specifications may contain errors and are subject to change without notice.  
Printed in Germany (2002) L833TEEC411 QJ

**We supply sound, not equipment.**  
www.toa.eu